


Model Name	DLF4	DLF5	DLF6.25	DLF8	DLF10	DLF15.6	DLF20
Pixel Pitch	4x8mm	5x10mm	6.25mm	8mm	10mm	15.6mm	20mm
LED Type	HCW 4in1. The LED lamp and driving IC are combined on one PCB, and the IC is on the front of the PCB, eliminating the copper bar plug-in						
Pixel Density (pixel/m ²)	312,500	200,000	256,000	15,625	10,000	4,096	2,500
Transparency	65%	68%	68%	70%	70%	75%	80%
Driving Mode	LED constant current drive						
Module Size	1000mm(W) X 320mm(H) X 3mm(D)						
Screen Body Weight	3kg/m ²						
Brightness	1000 - 6000 nit						
Gray Level	14 - 16 bit						
Color Processing	14 - 16 bit						
Color Capacity	65536						



Refresh Rate	≥ 3840Hz
Box Materials	Aluminium profile + transparent PC
Power Dissipation Mode	Self-cooling + aluminium profile
Scanning Mode	Static
Optimum Sight Angle (H/V)	160°
Optimum Sight Distance	> 5m
Working Voltage	AC110 ~ 240V, 50/60Hz
Maximum Power Consumption	800W/m ²
Average Power Consumption	240 ~ 300W/m ² (Depending on the frequency source)
Lifespan	100,000hrs
Working Temperature	-35°C ~ 65°C
Working Humidity	10% - 90% No dew appeared
Operating System	Colorlight/Novastar

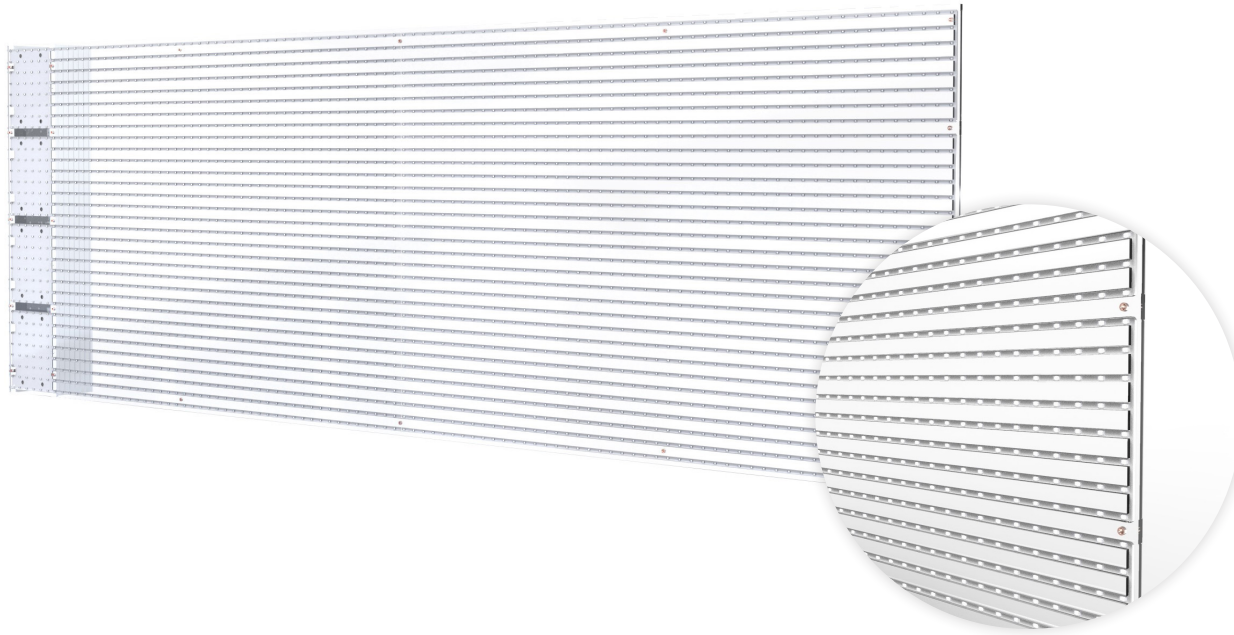