


WALL SERIES DATA SHEET



FRONT MODULE VIEW

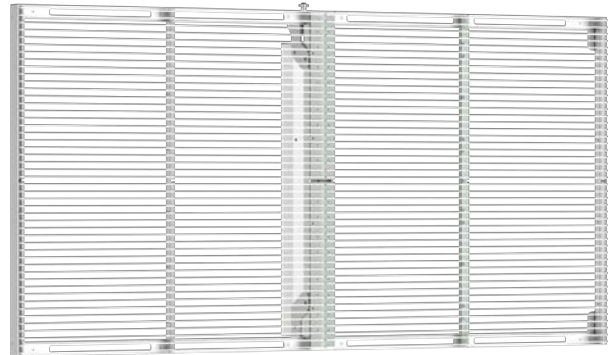

BACK MODULE VIEW



MODULE SIDE VIEW



MODULE SIDE VIEW



MULTIPLE MODULES



Model	W1.9	W3.1	W3.9	W5	W7.8	W10	W10H	Model	W16L	W16H	W20L	W20H	W25L	W25H								
Module Size * The depth of the ClearLED Wall module with power supply is 120mm/4.72" deep	W x H x D* 1000mm x 500mm x 30mm 39.37" x 19.685" x 1.18"							Module Size * The depth of the ClearLED Wall module with power supply is 120mm/4.72" deep							W x H x D* 1000mm x 500mm x 30mm 39.37" x 19.685" x 1.18"		W x H x D* 1000mm x 1000mm x 30mm 39.37" x 39.37" x 1.18"		W x H x D* 1000mm x 500mm x 30mm 39.37" x 19.685" x 1.18"		W x H x D* 1000mm x 1000mm x 30mm 39.37" x 39.37" x 1.18"	
Weight	16 kgs/m ² 35.27 lbs/m ²	16 kgs/m ² 35.27 lbs/m ²	16 kgs/m ² 35.27 lbs/m ²	15 kgs/m ² 33 lbs/m ²	14 kgs/m ² 30 lbs/m ²	13 kgs/m ² 28.67 lbs/m ²		Weight	12 kgs/m ² 26.46 lbs/m ²		11 kgs/m ² 24.25 lbs/m ²			10 kgs/m ² 22.05 lbs/m ²								
Pixel Pitch (mm)	1.9x3.1	3.13x 3.13	3.91x7.81	5.2x5.25	7.81x7.81	10 x 10		Pixel Pitch (mm)	15.6x15.6		20x20		25x25									
Brightness (nits)	2000	4000	5500	5500	5500	2000	8000	Brightness (nits)	4000	8000	2800	4500	2000	2800								
Transparency (%)	>50	>50	>76	>73	>76	>84	>84	Transparency (%)	>92	>87	>91		>93									
Module Resolution (pixel)	526 x 128	320 x 160	256 x 64	192 x 96	128 X 64	100 x 50		Module Resolution (pixel)	64 x 32		48 x 48	48 x 24	40 x 40	40 x 20								
Resolution (dot/m²)	64,512	102,400	32,768	35,026	16,384	9,216		Resolution (dot/m²)	4,096		2,304		1,600									
Ingress Protection	IP20							Ingress Protection	IP20													
Refresh Rate (Hz)	3850							Refresh Rate (Hz)	3850													
Viewing Angle (H / V)	120° / 120°							Viewing Angle (H / V)	120° / 120°													
Minimum Viewing Distance	>1 m >3'	3 m 10'	5 m 16.0'	6.5 m 21.4'	9.8 m 32.0'	13.0 m 42.7'		Minimum Viewing Distance	19.5 m 64.0'		25.0 m 82.0'			31.2 m 102.5'								
Life Time (hours)	100,000							Life Time (hours)	100,000													
Video Signal Input Interface	HDMI/DVI							Video Signal Input Interface	HDMI/DVI													
Working Temperature Range	-10 to +40 °C 32.18 to 104 F							Working Temperature Range	-10 to +40 °C 32.18 to 104 F													
Minimum Power Consumption (watts/module)	208	208	208	208	200	200		Minimum Power Consumption (watts/module)	100	200	135			135								
Average Power Consumption (watts/module)	580	550	530	510	440	430		Average Power Consumption (watts/module)	120	400	360			360								
Maximum Power Consumption (watts/module)	800	800	800	800	800	800		Maximum Power Consumption (watts/module)	400	800	400			400								
System Configuration	NovaStar							System Configuration	NovaStar													