


# CLEARLED : SKYPANEL COB INDOOR



Model	HQ-COB0.9	HQ-COB1.2	HQ-COB1.5	HQ-COB1.8
Pixel Pitch	0.9375mm	1.25mm	1.56mm	1.875mm
LED Type	Flip-chip COB			
Module Size	150mm(W) X 168.75mm (H)			
Module Resolution	160 X 180px	120 X 135px	96 X 108px	80 X 90px
Cabinet Size	600mm(W) X 337.5mm(H) X 39mm(D)			
Cabinet Resolution	640 X 360px	480 X 270px	384 X 216px	320 X 180px
Cabinet Weight	5.2kg			
Cabinet Material	Die-casting aluminium			
Power Consumption (Max.)	400W/m <sup>2</sup>	360W/m <sup>2</sup>	350W/m <sup>2</sup>	340W/m <sup>2</sup>
Power Consumption (Avg.)	134W/m <sup>2</sup>	120W/m <sup>2</sup>	117W/m <sup>2</sup>	110W/m <sup>2</sup>
Viewing Distance	≥ 1m	≥ 1.2m	≥ 1.5m	≥ 1.8m
Application Environment	Indoor			

# CLEARLED : SKYPANEL COB INDOOR

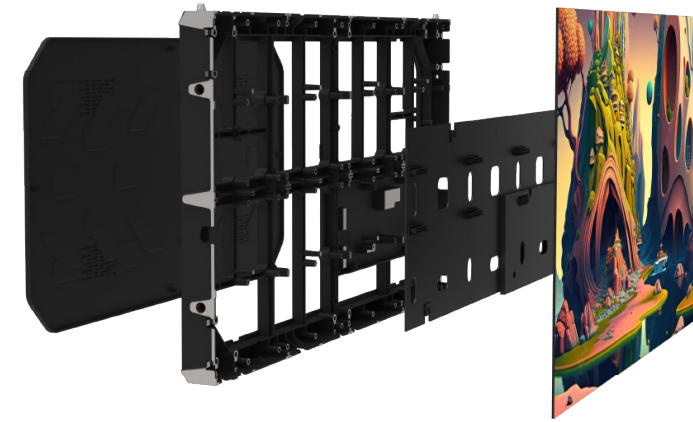

Color Temperature	6500K (adjustable)
Brightness	800~1000 nit
Maintenance Way	Front
Viewing Angle (H/V)	≥ 165°
Gray Level	14 - 16 bit
Contrast	10000:1
Refresh Rate	3840Hz
Frame Frequency	60Hz
AC Input Voltage	110V ~ 220V ±10%
Working Temperature	-20°C ~ 60°C
Working Humidity	10% ~ 90% RH
Lifespan	100,000hrs
Operating System	Windows(98/2000/XP/Vista/win7/8/10)
Data Interconnection	CAT5e or fiber

